




MVE 1530/6N-HC-39A0 [CN40153039A0BA0000]

3 PH - 4 poles - 6000 RPM - 220-240/400-460 V - 200 Hz

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power factor	Ia/In
6,82	3,41	1.373	220-240/400-460	1	Δ 2,8 Y 1,62	0,89	

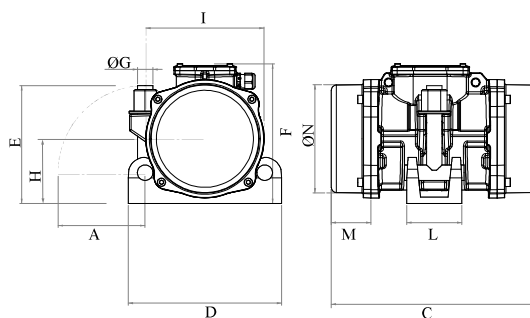

*Technical drawings are illustrative purposes only, please refer to 2D/3D drawings available on "FINDER" app.
Contact us for more information.

OVERALL DIMENSIONS (mm)												
Weight [Kg]	G	Holes number	A	E	C	L	M	N	I	F	H	D
17,5	22	1	68	172	276	190	43	156	174	200	94,5	190

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque (Nm)	Cable type	Cable gland
/	Yes	M20	21 x 37 mm	170	4G2.5 80°C	M25 120°C

BEARINGS LIFE HOURS				
Bearing model	Type	100% C.F	80% C.F	50% C.F
6306 2Z		/	/	/

CERTIFICATION	
Atex II 3D Ex tc IIIc Tx IP66 [Tx Size 10-30:100°C - Tx Size 40-91:135°C] T.Amb -20/+40°C	

REV.0-n/a

Dimension with coarse degree of accuracy related to UNI 22768/1 Rights reserved to modify technical specifications.